



25 YEAR LINEAR PERFORMANCE WARRANTY AND 10 YEAR PRODUCT WARRANTY



TYPE 1 FIRE CLASSIFICATION



WIND/SNOW LOAD CAPABILITY UP TO 5400PA



ANTI-REFLECTIVE GLASS COATING



PID FREE



#### Manufactured in the USA

**Quality Engineering:** Modules are manufactured with the highest quality and tested under our strictest quality standards to ensure a world class product.

**Warranty:** Centrosolar guarantees a maximum performance digression of 0.7% p.a. in the course of 25 years, a significant added value compared to the two-phase warranties common in the industry along with our 10 year product warranty.

## B-Series Monocrystalline




MADE IN USA OF US AND IMPORTED PARTS


Technical Data

Module Type	<b>BM60 285BB</b>
Peak Power (Pmax) * Watts	285
Module Efficiency	17.00%
Cell Type	Monocrystalline Silicon
Number of Cells in Series	60
Frame/Backsheet Colors	Black/Black
Power Tolerance	0 / +5 W
Voltage at Maximum Power (Vmp)	31.30
Current at Maximum Power (Imp)	9.20
Open Circuit Voltage (Voc)	39.70
Short Circuit Current (Isc)	9.84
Series Fuse (Amps)	25
Maximum System Voltage: Vdc	1000
Temperature Coefficient (Pmax): %/°C	-0.43
Temperature Coefficient (Voc): %/°C	-0.31
Temperature Coefficient (Isc): %/°C	+0.04
NOCT: degrees C	48
Mechanical Load	5400Pa (112 lb/ft <sup>2</sup> )
Weight in lbs (kg)	39.7 (18)
Connector Plug Type	MC4 Compatible

DEPENDENCE ON TEMPERATURE

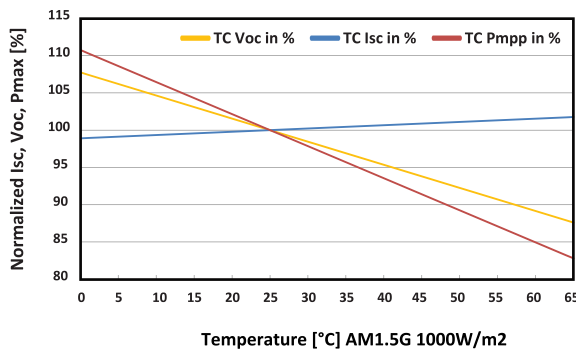

DEPENDENCE ON IRRADIANCE

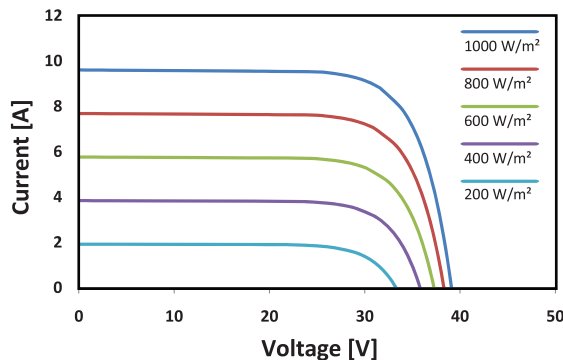

MECHANICAL SPECIFICATIONS

